




China 608 Bearing Supplier

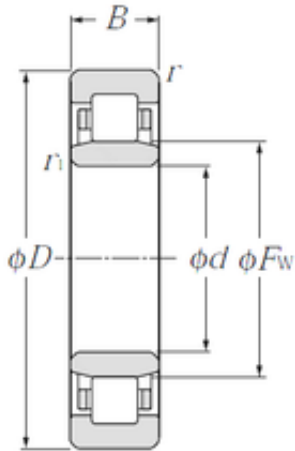

High quality NTN Cylindrical Roller Bearing NU217 NU218 NU219 NU220 NU222 NU224 NU226

Bearing No. NU217

Size	85x150x28 mm
Bore Diameter	85 mm
Outer Diameter	150 mm
Width	28 mm
d	85 mm
Fw	101,8 mm
D	150 mm
B	28 mm
C	28 mm
r min.	2 mm
r1 min.	2 mm
Weight	1,87 Kg
Basic dynamic load rating (C)	120 kN
Basic static load rating (C0)	140 kN
(Grease) Lubrication Speed	4 500 r/min
E	133.8 mm
F	101.8 mm
rs min	2 mm
r1s min	2 mm
Radial clearance class	CN
Mass (without HJ ring)	1.87 kg
Dynamic load, C	120 kN
Static load, C0	140 kN
Fatigue limit load, Cu	16.3 kN

NU217 Bearing 2D drawings and 3D CAD models



China 608 Bearing Supplier

Nlim (oil)	5,300 rpm
Nlim (grease)	4,500 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.23 Hz
Characteristic outer ring frequency, BPF0	6.91 Hz
Characteristic inner ring frequency, BPGI	9.09 Hz
da min	94 mm
da max	99 mm
db min	104 mm
Da max	141 mm
ra max	2 mm
r1a max	2 mm
Category	Roller Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	1.873
Product Group	B04144
bore diameter:	85 mm
static load capacity:	140000 N
outside diameter:	150 mm
precision rating:	ISO Class 0
overall width:	28 mm
maximum rpm:	5300 rpm
flanges:	(2) Outer Ring
bearing material:	Hardened Alloy Steel



China 608 Bearing Supplier

bore type:	Straight
cage material:	Pressed Steel
number of rows:	1
finish/coating:	Uncoated
internal clearance:	CN
closure type:	Open
ring separation:	Separable Inner Ring
fillet radius:	2 mm
operating temperature range:	-40 to 120 ° C
manufacturer product page:	Click here
dynamic load capacity:	120000 N